

RNA Productinfo

Soundproofing Housings – maximum noise reduction

- Sheet steel housing – painted on the outside
- 2 self-locking hinged lids made of 8 mm Makrolon for easy and safe access to the system
- 2 side doors for easy access to the system's controls
- 15 mm thick noise insulation mat glued to the inside of the doors and housing
- Special RNA rubber seal on doors and lids for optimum tightness of the soundproof housing and maximum noise reduction of the system
- Retractable door locks to prevent accidents caused by protruding parts
- Ergonomically positioned lid handles for easy opening and closing of the hinged lids
- The soundproof housing is customized to the system and the customer's requirements




Technical specifications

band body	Stainless steel 1.4301
material of the coat	2 mm sheet steel, painted
lid	8 mm Macrolon
insulation	15 mm sound insulation material
dimensions	adapted to the size of the plant

Perfection in detail



Ergonomic handle for easy opening

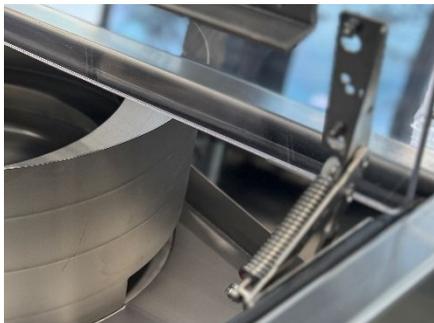

Self-locking folding hinges